


## 1705A 17" LCD Open Frame Touchmonitor

The GreenTouch's 1705A LCD open frame touch monitor is a touch solution developed for automated information systems, gaming and entertainment, as well as light industrial automation controls, making GreenTouch's touchmonitor product line even more complete. The 1705A touch monitor is based on the concept "Design for simple and convenience", with proven GreenTouch expertise and reliability. Precise small frame design will be completely sealed touch screen, so that it has dust-proof, dirt-proof and water-proof function, and make it easier for customers to install 1705A in the cabinet. Designed and built by GreenTouch, the model has a long life cycle Period and can supply long-term demands. Even if the future replacement of a new generation of LCD panels, you do not need to do external changes.

The 1705A is available in a variety of industry-leading GreenTouch touch technologies and is available in single-touch and multi-touch versions, including Four-wire resistive, five-wire resistive, infrared, PCAP and surface acoustic wave. This model has a global standard of agency certification with GreenTouch warranty and overall after-sale service. The 1705A LCD open frame touch monitor is a cost-effective touch solution for system integrators and value-added resellers (VARs).

### Applications

- Information Kiosk
- Game and Entertainment
- Industrial Automation
- Self-checking service

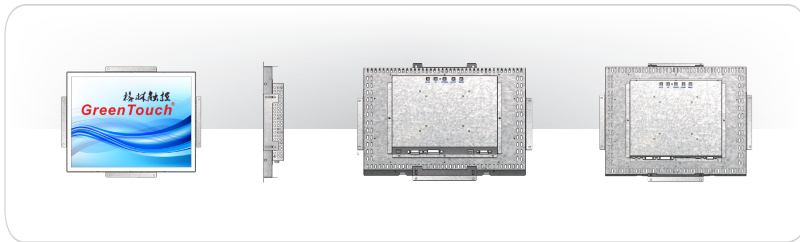

### Features

- Optional touch technologies include:  
four-wire resistive  
five-wire resistive  
Surface acoustic wave  
Infrared  
PCAP
- Compact and easy to integrate with mounting from sides or top and bottom; also a VESA mount option
- Worldwide agency approvals
- One year standard warranty

### About GreenTouch

Shenzhen GreenTouch Technology Co., Ltd. is a professional manufacturer of product. Our company specializes in R&D, manufacture and marketing of high-grade touch screen and value-added touch machine. Our company has our own brand—Green-Touch and provides customers with touch products including SAW touch screen, IR touch screen, four-wire touch screen, five-wire touch screen, various touch screen monitors and touch all in one PC TV. GreenTouch has automatic production lines and the sealed dust-free workshops and has been certified to ISO9001 Quality Management System and ISO14001 Environmental Management System. The products are inspected in strict accordance with the quality management system. Quality management becomes an essential part of operation. Our products have been certified to CE, FCC, ETL, ROHS and UL. The objective of GreenTouch is to become the most reliable supplier of touch screen, high value-added and special touch products and touch solutions in the world.

### Specifications

Case/ frame color	Black / Silver color
Display type	Active matrix TFT LCD, LED backlight
The diagonal dimension	17.0" diagonal
Aspect ratio	5:4
Active Area Dimensions	337.9mm(H) x 270.3mm(W)
The display size	Monitor (362mm(W) x 300mm(H), Thickness: 48 mm) Resistive version (362mm(W) x 300mm(H), Thickness: 49mm) SAW: (388mm(W) x 320 mm(H), Thickness: 60 mm) Infrared version (376mm(W) x 308mm(H), Thickness: 53 mm) Projected Capacitive 388 mm(W) x 300 mm(H), Thickness: 48 mm)
Resolution (pixel)	1280 x 1024
Other supported resolutions (pixel)	1024 x 768 ; 800 x 600; 720 x 400 ; 720 x 350; 640 x 480, 60 Hz
Display Colors	16.7M
Brightness (Standard)	LCD panel: 250 nits (Typ.); 4-wire resistive / 5-wire resistive: 200 nits (Typ.); Projected Capacitive / Surface Acoustic Wave / Infrared: 250 nits (Typ.)
Response time (standard)	5 msec
View Angle (from center)	Horizontal (left / right): ± 85° or total 170° Vertical (up / down): ± 80° or a total of 160°
Contrast ratio (standard)	1000: 1 (Typ.)
Input video formats	Analog VGA and digital DVI (optional HDMI I)
Input Video Signal Connector	Female head DE - 15 connector, female head DVI - D, Dual - Link connector, female head HDMI connector
Sweep frequency	Horizontal: 31.5 - 60.2 kHz; vertical: 56.3 - 75 Hz
Power	External DC, input voltage DC: 12V; INPUT POWER CONNECTOR SPECIFICATIONS (for all in one PC) - Type: DC cartridge receptacle; Cartridge ID: 5.5 mm (± 0.3 mm); Needle OD: 2.0 mm (+0.0 -0.1 mm); Cartridge depth: 8.0 mm (± 0.3 mm); Power connector (on power adapter) - Type: DC cartridge Plug; Cartridge OD: 5.5 mm (± 0.1 mm); Needle Inner Diameter: 2.1 mm (± 0.1 mm); Cartridge Length: 9.5 mm (± 0.5 mm)
Power consumption (standard)	Display only: 13.5W (Typ.)
Temperature	Operating: 0° C to 60° C; Storage: -20° C to 60° C
Humidity	Operating: 20% to 80% (no condensation); Storage: 10% to 90% (non-condensing)
MTBF	50,000 hours
Weight (approx.)	Net weight: 4.8 kg (Typ.); Shipping: (5.9 kg (reference))
Warranty	1 year
OSD	Digital OSD
User Controls	OSD Button: Menu, Up, Down, Select, Power; OSD: Contrast, Brightness, Horizontal / Vertical Bits Clock, phase, call default, language (English, German, Spanish, Japanese, French); OSD Fail / Active: Power, OSD menu
OSD Remote Accessories	Optional controls (front): Menu, Up, Down, Select, Power
Water and dust protection/Explosion-proof	IP65 (front)/IK08 (front)
Mounting options	100mm or 75mm VESA mounting, open bracket mounting
Surface treatment	AG AR AF (Optional)
Agency Approvals	UL cUL (Recognized), FCC, CE, CB, China RoHS CQC

### Ordering Information

Model	Part Number	Touch Technology	Display Ports	Interface	Surface Treatment	Availability
1705A	GT-OM-1705A		VGA, DVI		Clear	Worldwide
	GT-TM-1705A-4R	4-wire resistive	VGA, DVI	USB	Antiglare	Worldwide
	GT-TM-1705A-5R	5-wire resistive	VGA, DVI	USB	Antiglare	Worldwide
	GT-TM-1705A-IRB	B-series Infrared	VGA, DVI	USB	Clear	Worldwide
	GT-TM-1705A-IRK	K-series Infrared	VGA, DVI	USB	Clear	Worldwide
	GT-TM-1705A-AW	Surface Accoutic Wave	VGA, DVI	Serial or USB	Clear	Worldwide
	GT-TM-1705A-AWAL	SAW with aluminium bezel	VGA, DVI	Serial or USB	Clear	Worldwide
	GT-TM-1705A-CTW	W-series PCAP	VGA, DVI	USB	Clear	Worldwide
	GT-OM-1705A-HD		VGA, DVI, HDMI		Clear	Worldwide
	GT-TM-1705A-4R-HD	4-wire resistive	VGA, DVI, HDMI	USB	Antiglare	Worldwide
	GT-TM-1705A-5R-HD	5-wire resistive	VGA, DVI, HDMI	USB	Antiglare	Worldwide
	GT-TM-1705A-IRB-HD	B-series Infrared	VGA, DVI, HDMI	USB	Clear	Worldwide
	GT-TM-1705A-IRK-HD	K-series Infrared	VGA, DVI, HDMI	USB	Clear	Worldwide
	GT-TM-1705A-AW-HD	Surface Accoutic Wave	VGA, DVI, HDMI	Serial or USB	Clear	Worldwide
	GT-TM-1705A-AWAL-HD	SAW with aluminium bezel	VGA, DVI, HDMI	Serial or USB	Clear	Worldwide
	GT-TM-1705A-CTW-HD	W-series PCAP	VGA, DVI, HDMI	USB	Clear	Worldwide

To find out more about our extensive range of GreenTouch touch solutions, go to [www.greentouch.com.cn](http://www.greentouch.com.cn), or [ifo@greentouch.com.cn](mailto:ifo@greentouch.com.cn)

Service call: +86-755-29370883/29371519

Shenzhen GreenTouch Technology Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. GreenTouch (logo) and Shenzhen GreenTouch Technology Co., Ltd. Copyright . All rights reserved.