


1	2	3	4	5	6	7
版本		变更原因			日期	姓名



Logic:

Pin	OUT
1	XL
2	YD
3	XR
4	YU



Notes:

- 1.Type:film+glass+tail
- 2.Operating Voltage: $\leq 10v$
- 3.Operation Temperature: $-20^{\circ}C \sim 70^{\circ}C$   
Storage Temperature: $-40^{\circ}C \sim 80^{\circ}C$
- 4.Life Time:1.000.000 times
- 5.Connect Material:FPC
- 6.Response Time: $\leq 10ms$
- 7.Linearity: $\leq 1.5\%$
- 8.Transmittance: $\geq 75\%$
- 9.Surface Hardness $\geq 3H$ (pencil)
- 10.Operation force:30g~120g
- 11.Resistance:X:483 $\Omega$ -1182 $\Omega$  Y:151 $\Omega$ -369 $\Omega$

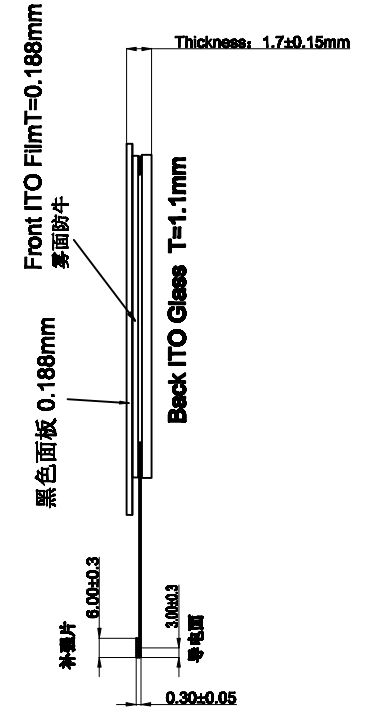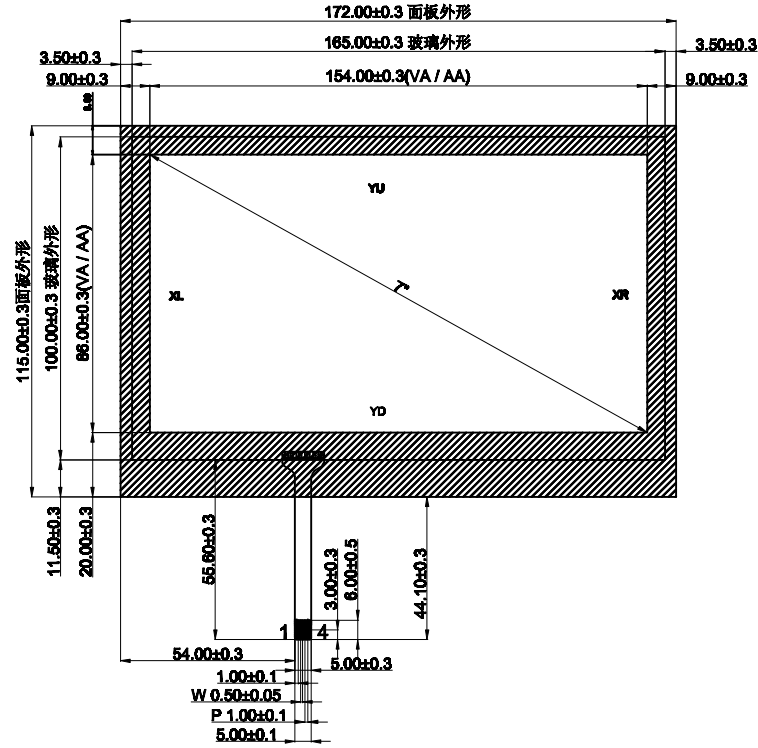

TOLERANCES  
(UNLESS OTHERWISE STATED)  
DECIMALS ANGLES  $\pm 0.5^{\circ}$

>2000MM	$\pm 2.00MM$
1600 < X $\leq$ 2000MM	$\pm 1.20MM$
1200 < X $\leq$ 1600MM	$\pm 0.80MM$
800 < X $\leq$ 1200MM	$\pm 0.50MM$
400 < X $\leq$ 800MM	$\pm 0.40MM$
120 < X $\leq$ 400MM	$\pm 0.30MM$
30 < X $\leq$ 120MM	$\pm 0.20MM$
< 30MM	$\pm 0.10MM$

<b>绿以触控</b> <b>GreenTouch</b>		Shenzhen GreenTouch Technology Co.,Ltd			
Model No.:	GT-4W-7J-1	Size	7"	Ratio	16:9
Structure	G+F+P	Unit	mm	Scale	1:1
Design	李俊	Date	2016.5.16	Page	1/1
Check	付作伟	Date	2016.5.16	Version	A0
Release	汪群	Date	2016.5.16		