



标示	更改内容	签名	日期
1			

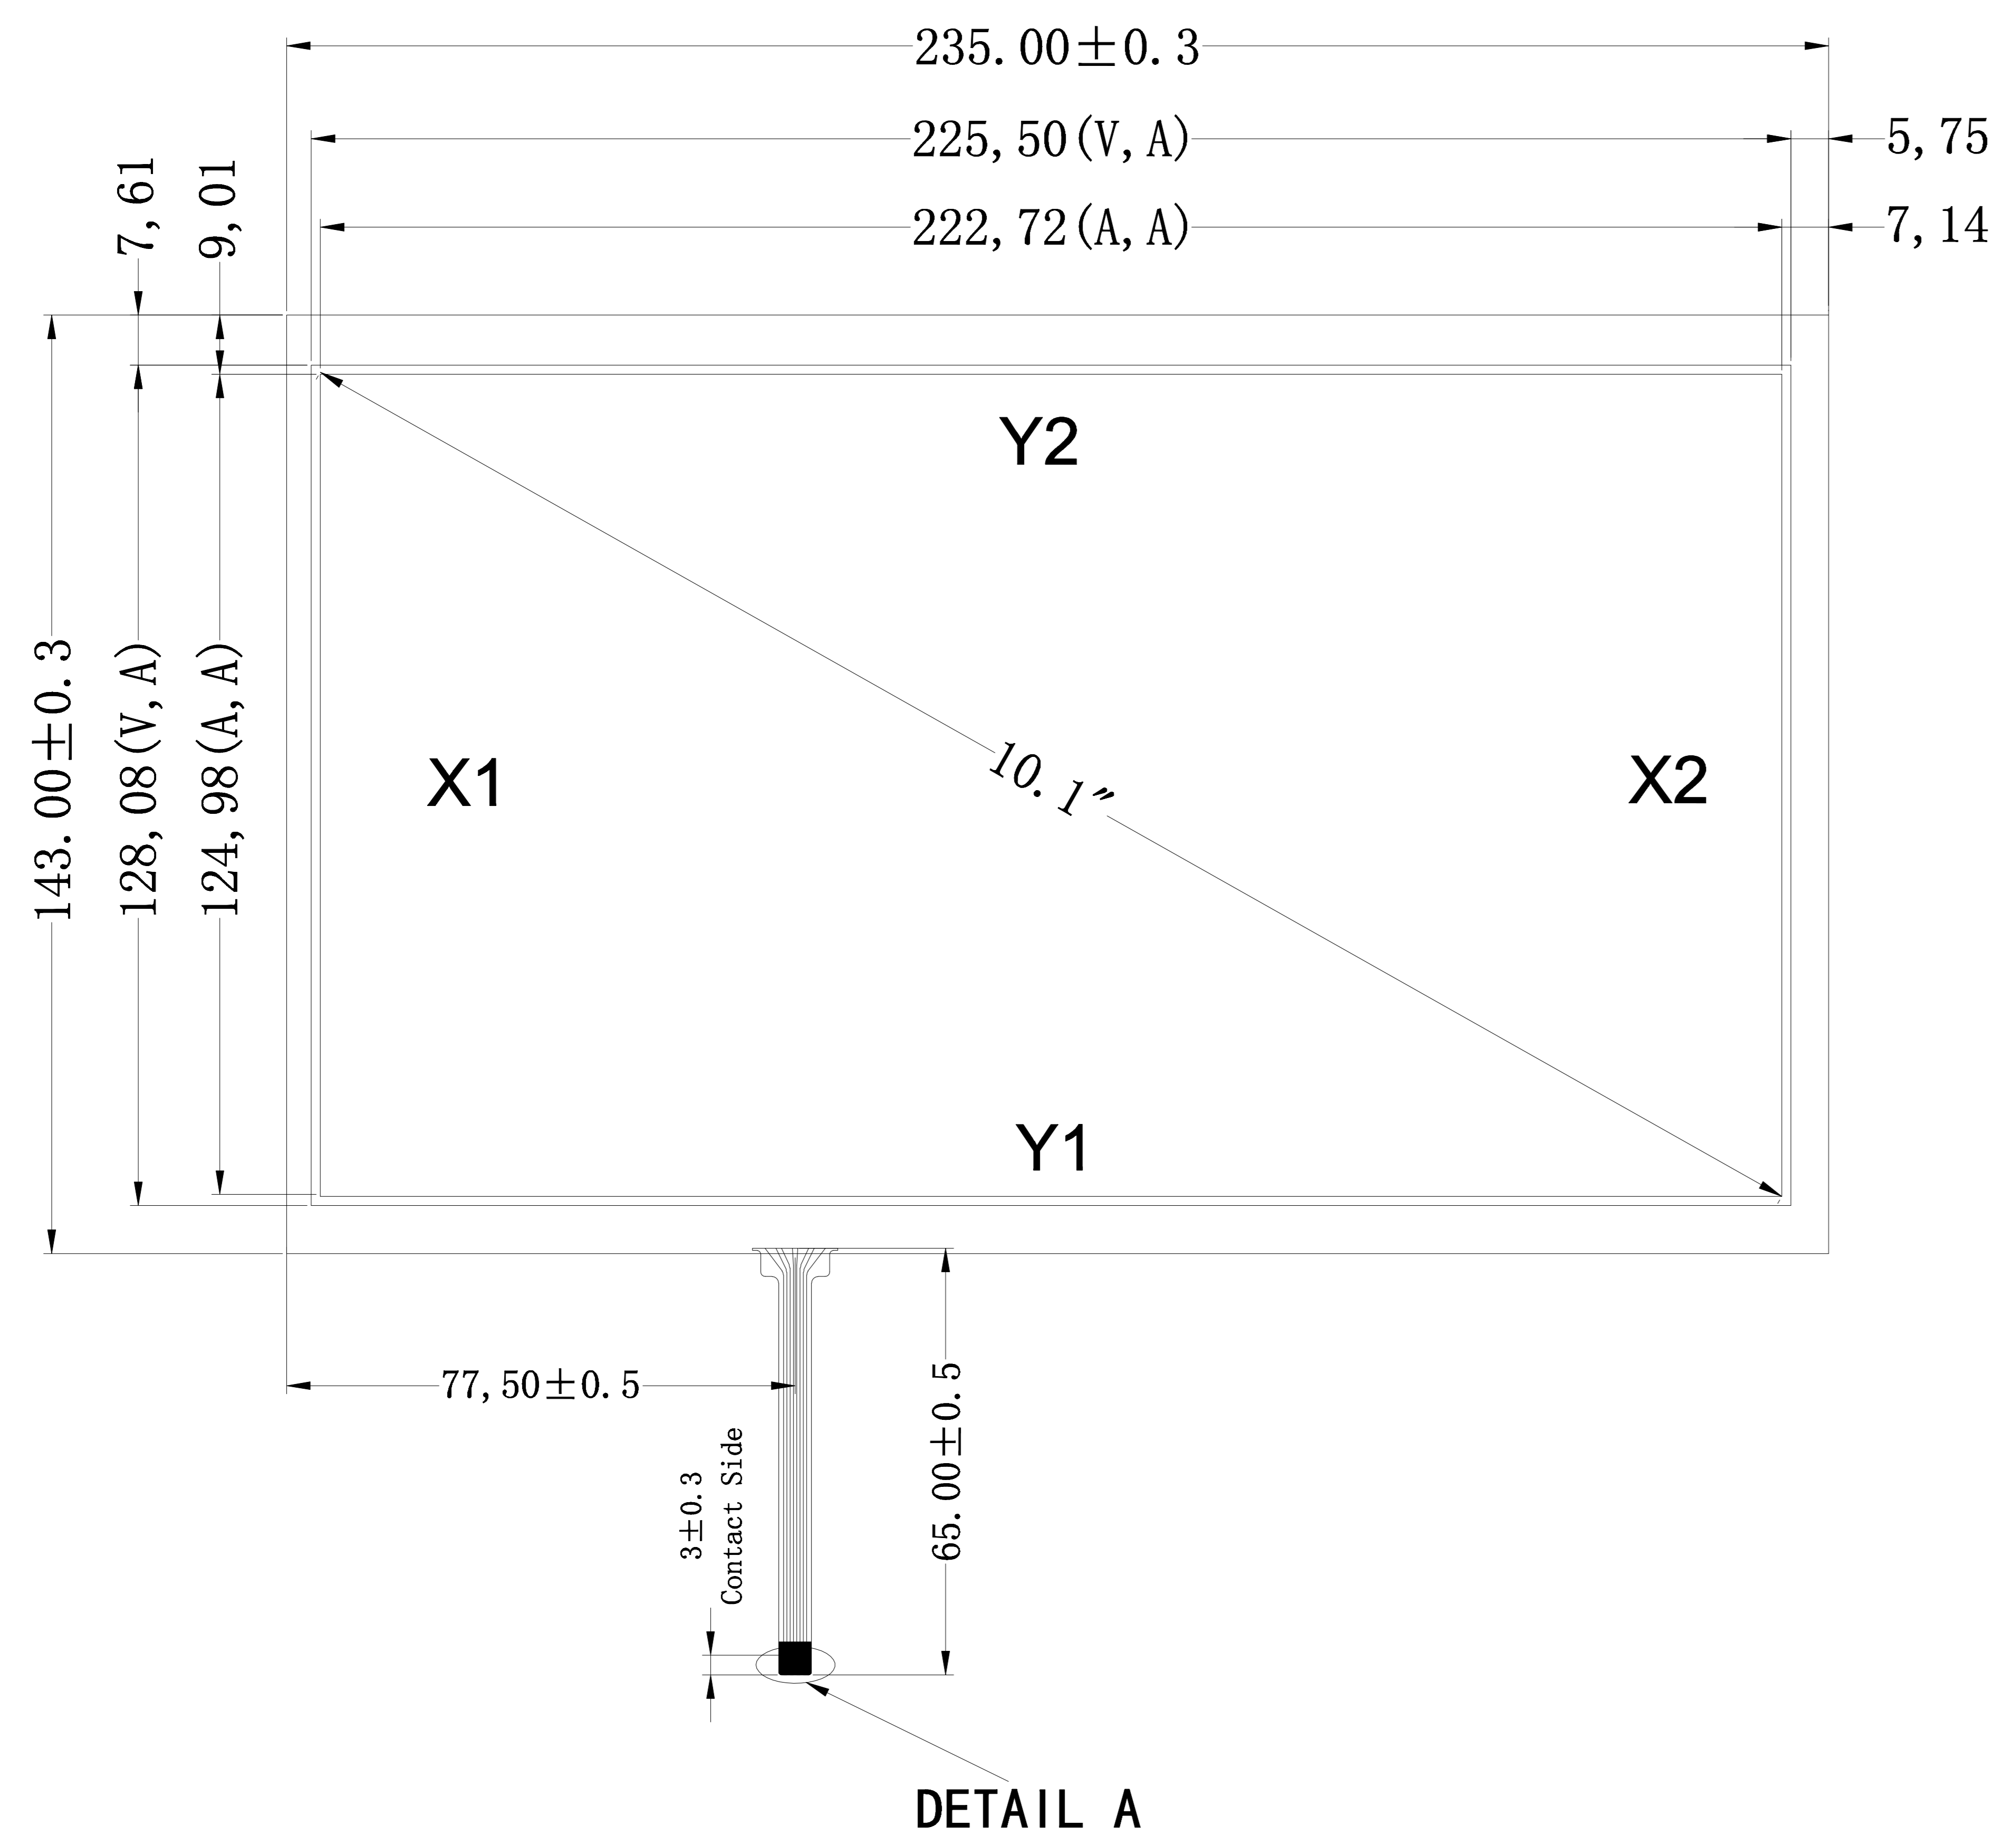


DETAIL A

PIN	OUT	Contact Side
1	X1	
2	Y1	
3	X2	
4	Y2	

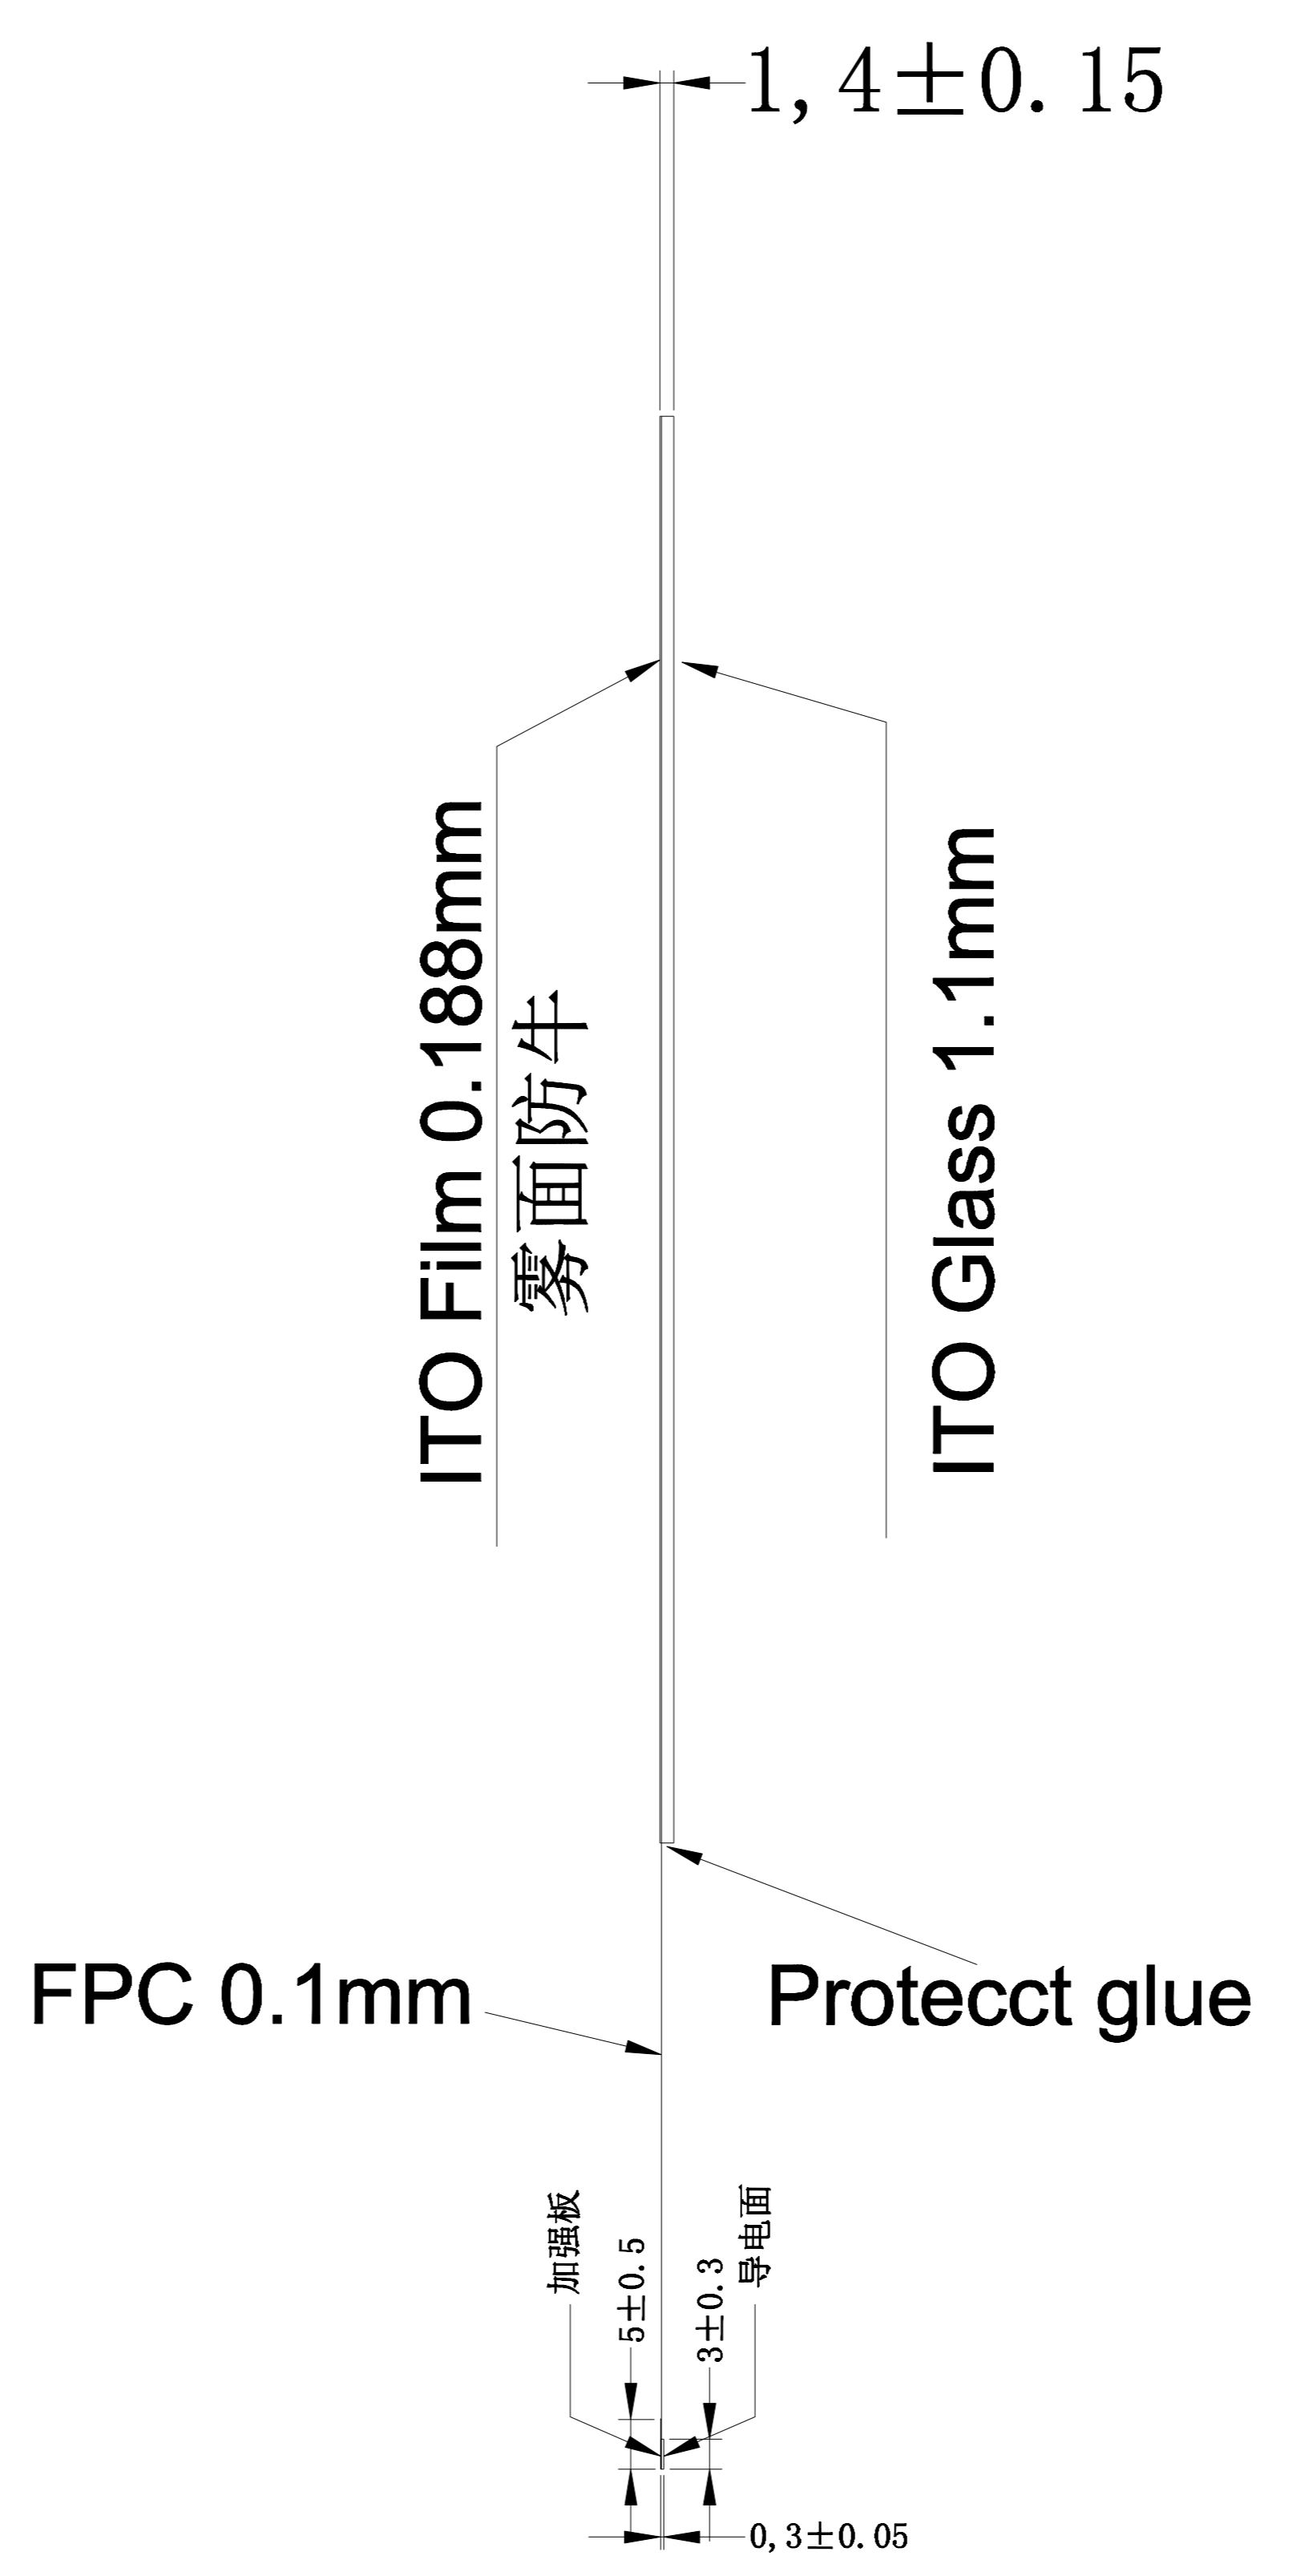

- Notes:**
- 1.Type:ITO Glass+ITO Film+FPC
 - 2.Operating Voltage:≤10V
 - 3.Operation Temperature: -10℃~50℃
Storage Temperature:-30℃~80℃
 - 4.Life Time:>1,000,000 times
 - 5.Connect Material:FPC
 - 6.Response Time: ≤10ms
 - 7.Linearity: ≤1.5%
 - 8.Transmittance: ≥76%
 - 9.Surface Hardness: ≥3H(pencil)
 - 10.Operation force:20g~150g
 - 11.Resistance:X:481Ω-1176Ω
Y: 152Ω-370Ω

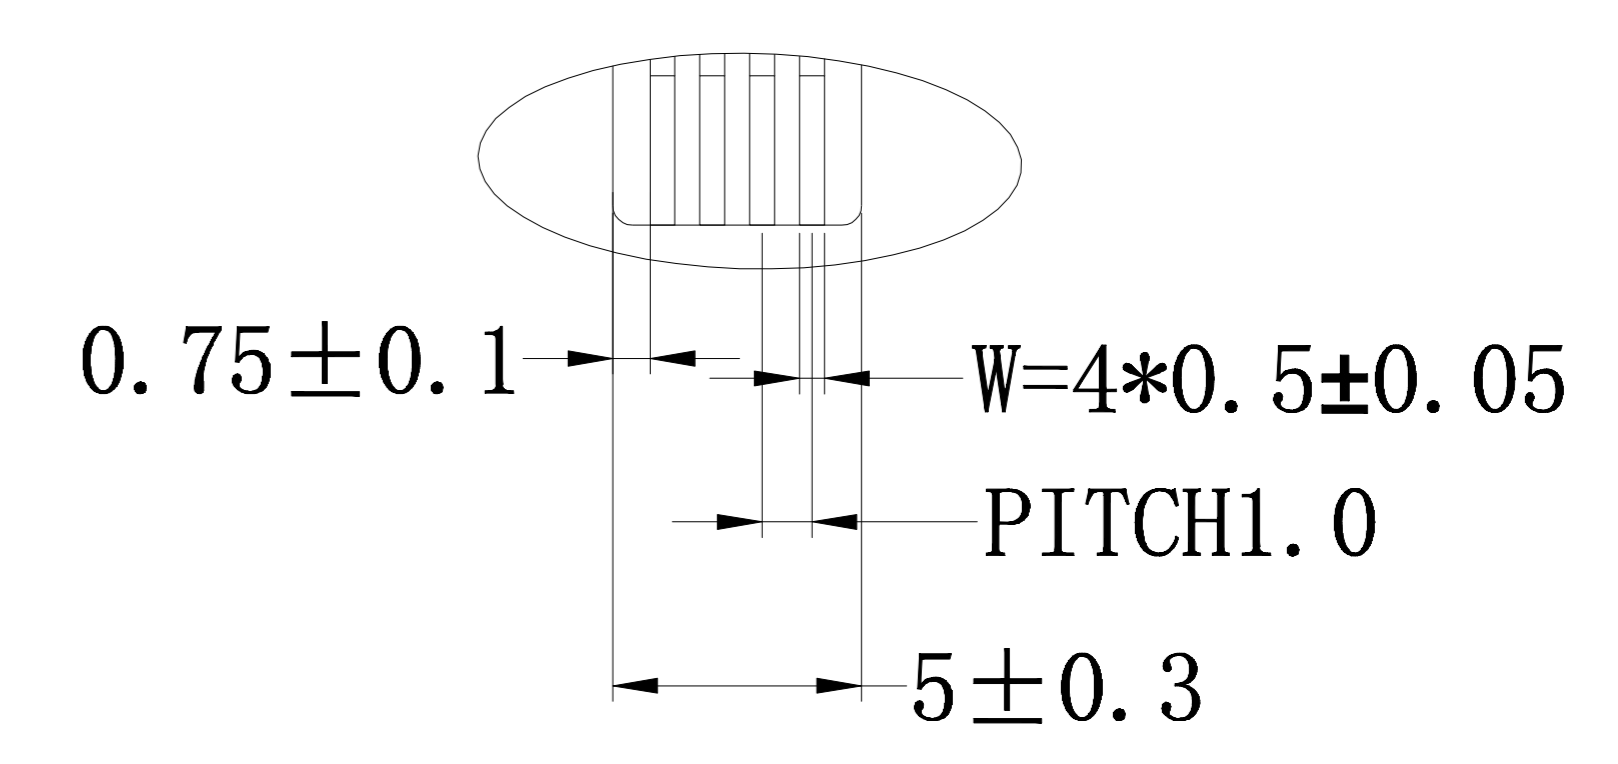

DetailA

TOLERANCES
(UNLESS OTHERWISE STATED)

DECIMALS	ANGLES	±0.5%
>2000MM	±2.00MM	
1600< X ≤2000MM	±1.20MM	
1200< X ≤1600MM	±0.80MM	
800< X ≤1200MM	±0.50MM	
400< X ≤800MM	±0.40MM	
120< X ≤400MM	±0.30MM	
30< X ≤120MM	±0.20MM	
<30MM	±0.10MM	

格林触控
GreenTouch

Shenzhen GreenTouch Technology Co.,Ltd

Model No.:	GT-4W-101A-1	Size	10.1"	Ratio	16:10
Structure	G+F	Unit	mm	Scale	1:1
Design	李俊	Date	2015.8.5	Page	1/1
Check	付作韦	Date	2015.8.5	Version	A0
Release	汪陈	Date	2015.8.5		

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作