


**TOLERANCES (UNLESS OTHERWISE STATED)**

DECIMALS	ANGLES	$\pm 0.5\%$
$>2000MM$	$\pm 2.00MM$	
$1600 < X \leq 2000MM$	$\pm 1.20MM$	
$1200 < X \leq 1600MM$	$\pm 0.80MM$	
$800 < X \leq 1200MM$	$\pm 0.50MM$	
$400 < X \leq 800MM$	$\pm 0.40MM$	
$120 < X \leq 400MM$	$\pm 0.30MM$	
$30 < X \leq 120MM$	$\pm 0.20MM$	
$<30MM$	$\pm 0.10MM$	

- Notes:**
- Type: Film to Glass
  - Operating Voltage:  $\leq 10v$
  - Operation Temperature:  $-10^{\circ}C \sim 60^{\circ}C$   
Storage Temperature:  $-20^{\circ}C \sim 70^{\circ}C$
  - Life Time: 1,000,000 times
  - Connect Material: FPC
  - Response Time:  $\leq 10ms$
  - Linearity:  $\leq 1.5\%$
  - Transmittance:  $\geq 75\%$
  - Surface Hardness  $\geq 3H$  (pencil)
  - Operation force:  $60g \sim 150g$
  - Resistance: X:  $360\Omega - 879\Omega$  Y:  $203\Omega - 496\Omega$

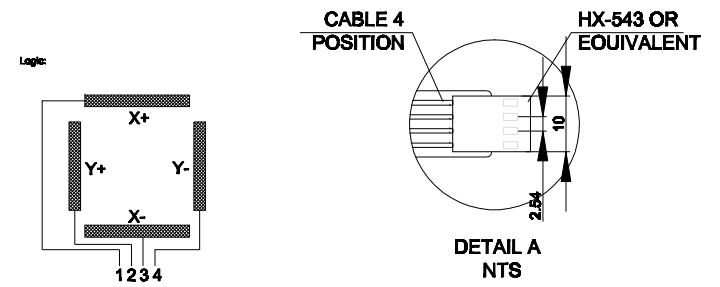

		Shenzhen GreenTouch Technology Co., Ltd					
		Model No.:	GT-4W-104A-1	Size	10.4"	Ratio	4:3
Structure	G+F	Unit	mm	Scale	1:1		
Design	李俊	Date	2015.7.20	Page	1/1		
Check	付作伟	Date	2015.7.20	Version	A0		
Release	汪峰	Date	2015.7.20				