


4

3



2

1

CABLE 4 POSITION
HX-543 OR EQUIVALENT



DETAIL A
NTS

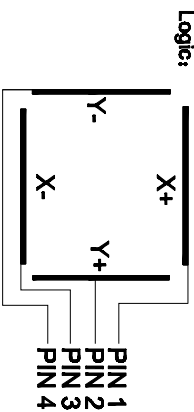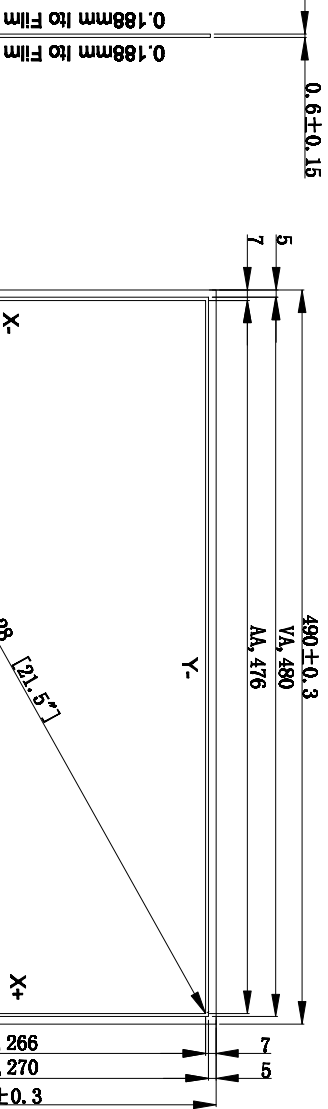

- Notes:
1. Type: Film to Film
 2. Operating Voltage: $\leq 10V$
 3. Operation Temperature: $-20^{\circ}C \sim 65^{\circ}C$
Storage Temperature: $-30^{\circ}C \sim 70^{\circ}C$
 4. Life Time: 1,000,000 times
 5. Connect Material: FPC
 6. Response Time: $\leq 10ms$
 7. Linearity: $\leq 1.5\%$
 8. Transmittance: $\geq 75\%$
 9. Surface Hardness: $\geq 3H$ (pencil)
 10. Operation force: $60g \sim 150g$
 11. Resistance: X: $483\Omega - 1181\Omega$ Y: $151\Omega - 369\Omega$

TOLERANCES
(UNLESS OTHERWISE STATED)
DECIMALS ANGLES 30.5%

1800 < X ≤ 200MM	±2.00MM	±2.00MM
1200 < X ≤ 1600MM	±0.25MM	±0.25MM
800 < X ≤ 1200MM	±0.20MM	±0.20MM
400 < X ≤ 800MM	±0.15MM	±0.15MM
120 < X ≤ 400MM	±0.10MM	±0.10MM
30 < X ≤ 120MM	±0.05MM	±0.10MM

GreenTouch 绿触科技		GreenTouch Technology Co., Ltd	
Model No.:	GT-4H-215A-2	Size	21.5"
Structure	F+T	Unit	mm
Design	2015.7.5	Date	2015.7.5
Check	2015.7.5	Date	2015.7.5
Released	2015.7.5	Date	2015.7.5
Scale	1:1	Ratio	1:1
Page	1/1	Version	A.0

A

D

A

D

4

3

2

1