

SPECIFICATION FOR APPROVAL

- () Preliminary Specification
- () Final Specification

Title 43.0" WUXGA TFTLCD	
--------------------------	--

BUYER	General
MODEL	

SUPPLIER	LIER LG Display Co., Ltd.	
*MODEL	LD430EUE	
SUFFIX	FHB1 (RoHS Verified)	

APPROVED BY	SIGNATURE DATE				
Please return 1 copy for your confirmation with					
your signature and comments.					

APPROVEDBY	SIGNATURE DATE				
Hong Sung Song / Team Leader					
REVIEWED BY					
Ji Kyoung Kim / Project Leader					
PREPARED BY					
Dong Uk Lee / Engineer					
TV Product Development Dept. LG Display Co., Ltd.					

Ver. 1.0 0 / 37

CONTENTS

Number	ITEM	Page
	COVER	0
	CONTENTS	1
	RECORD OF REVISIONS	2
1	GENERAL DESCRIPTION	3
2	ABSOLUTE MAXIMUM RATINGS	4
3	ELECTRICAL SPECIFICATIONS	5
3-1	ELECTRICAL CHARACTERISTICS	5
3-2	INTERFACE CONNECTIONS	7
3-3	SIGNAL TIMING SPECIFICATIONS	9
3-4	LVDS SIGNAL SPECIFICATION	11
3-5	COLOR DATA REFERENCE	14
3-6	POWER SEQUENCE	15
4	OPTICAL SPECIFICATIONS	16
5	MECHANICAL CHARACTERISTICS	21
6	RELIABILITY	24
7	INTERNATIONAL STANDARDS	25
7-1	SAFETY	25
7-2	ENVIRONMENT	25
8	PACKING	26
8-1	DESIGNATION OF LOT MARK	26
8-2	PACKING FORM	26
9	PRECAUTIONS	27
9-1	MOUNTING PRECAUTIONS	27
9-2	OPERATING PRECAUTIONS	27
9-3	ELECTROSTATIC DISCHARGE CONTROL	28
9-4	PRECAUTIONS FOR STRONG LIGHT EXPOSURE	28
9-5	STORAGE	28
9-6	HANDLING PRECAUTIONS FOR PROTECTION FILM	28

Ver. 1.0 1 / 37

RECORD OF REVISIONS

Revision No.	Revision Date	Page	Description
0.1	30 th . Sep, 2014	-	Preliminary Specification (First Draft)
0.2	23 th . Oct, 2014	-	Update packing information
0.3	19 th . Nov. 2014	-	Update Color target (TBD)
0.4	12 th , Dec. 2014	21~24	Update 5. Mechanical characteristics & 6. Reliablity
		3	Update General Features
		5~6, 16	Update TBD
		29	Change portrait direction from clockwise to counter-clockwise
0.5	13 th , Jan. 2015	17	Delete notes for coler coordinate
0.6	22 th , Jan. 2015	3	Change Power consumption(Driver current change)
		6	Update Electrical characteristics (Driver current change)
		6	Update Burst Dimming duty spec.
0.7	25 th , Jan. 2015	30	Update pallet material
1.0	12 th , Feb. 2015	3	Update General features
		5	Update Notes 5
		6	Update Table 3
		21	Update Table 12
		24	Update Table 13
		27	Update 9-1. Mounting Precautions
	27 th . Feb. 2015	24	Update 6. Reliability, Table 13, Note
		-	Final CAS specification.

Ver. 1.0 2 / 37


1. General Description

The LD430EUE is a Color Active Matrix Liquid Crystal Display with an integral Light Emitting Diode (LED) backlight system. The matrix employs a-Si Thin Film Transistor as the active element.

It is a transmissive display type which is operating in the normally black mode. It has a 43.0 inch diagonally measured active display area with WUXGA resolution (1080 vertical by 1920 horizontal pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arrayed in vertical stripes. Gray scale or the luminance of the sub-pixel color is determined with a 8-bit gray scale signal for each dot. Therefore, it can present a palette of more than 16.7Million colors.

It has been designed to apply the 8-bit 2-port LVDS interface.

It is intended to support Commercial Display where high brightness, super wide viewing angle, high color gamut, high color depth and fast response time are important.

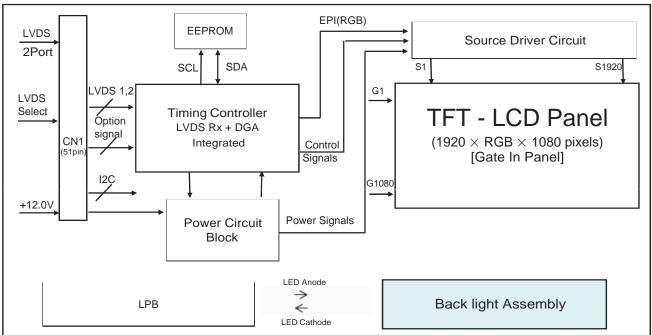

General Features

Active Screen Size	42.51inches (1079.87 mm) diagonal
Outline Dimension	963.6(H) × 557.9(V) × 14.0(B) mm (Typ.)
Pixel Pitch	0.4902 mm x 0.4902 mm
Pixel Format	1920 horiz. by 1080 vert. Pixels, RGB stripe arrangement
Color Depth	8bit, 16.7 Million colors
Luminance, White	450 cd/m ² (Center 1point ,Typ.)
Viewing Angle (CR>10)	Viewing angle free (R/L 178 (Min.), U/D 178 (Min.))
Power Consumption	Total 41.8W (Typ.) [Logic= 4.4W(Typ.)/,5.8W(Max.),BLU=37.4W(Typ.)/43.4W(Max.)
Weight	7.5Kg (Typ.)
Display Mode	Transmissive mode, Normally black
Surface Treatment	Hard coating(3H), Anti-glare treatment of the front polarizer (Haze 1%(Typ.))
Possible Display Type	Landscape and Portrait Enabled


Ver. 1.0 3 / 37

2. Absolute Maximum Ratings

The following items are maximum values which, if exceeded, may cause faulty operation or permanent damage to the LCD module.

Parameter		Symbol	Value		Unit	Note
		Symbol	Min	Max	Offic	14016
Power Input Voltage	LCD Circuit	VLCD	-0.3	+14.0	VDC	
LED Input Voltage	Forward Voltage	VF	-	140	VDC	1
T-Con Option Selection Voltage		VLOGIC	-0.3	+4.0	VDC	
Operating Temperature	Operating Temperature		0	+50	°C	2.2
Storage Temperature		Тѕт	-20	+60	°C	2,3
Panel Front Temperature		Tsur	-	+68	°C	4
Operating Ambient Humidity		Нор	10	90	%RH	0.0
Storage Humidity		Нѕт	5	90	%RH	2,3

- 1. Ambient temperature condition (Ta = 25 ± 2 °C)
- 2. Temperature and relative humidity range are shown in the figure below. Wet bulb temperature should be Max 39 °C, and no condensation of water.
- 3. Gravity mura can be guaranteed below 40 °C condition.
- 4. The maximum operating temperatures is based on the test condition that the surface temperature of display area is less than or equal to 68 °C with LCD module alone in a temperature controlled chamber. Thermal management should be considered in final product design to prevent the surface temperature of display area from being over 68°?. The range of operating temperature may be degraded in case of improper thermal management in final product design.

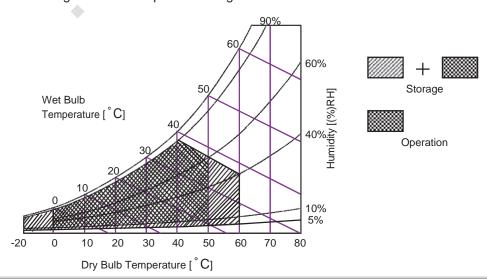

Ver. 1.0 4 / 37

3. Electrical Specifications

3-1. Electrical Characteristics

It requires two power inputs. One is employed to power for the LCD circuit. The other Is used for the LED backlight and LED Driver circuit.


Table 2. ELECTRICAL CHARACTERISTICS

Parameter		Symbol	Value			Unit	Note
		Symbol	Min	Тур	Max	Offic	Note
Circuit :							
Power Input Voltage		VLCD	10.8	12.0(12.7)	14.0	VDC	
Power Input Current		ILCD	-	370 (345)	481	mA	1
1 ower input ourront		ILOD	-	525 (490)	682	mA	2
T-CON Option	Input High Voltage	V _{IH}	1.62	-	1.98	VDC	
Selection Voltage	Input Low Voltage	V _{IL}	0	-	0.54	VDC	
Power Consumption		PLCD	-	4.4 (4.4)	5.7	Watt	1
Rush current		Irush	-	-	5.0	А	3

notes

- 1. The specified current and power consumption are under the V_{LCD} =12.0V, Ta=25 ± 2 °C, f_V =60Hz condition, and mosaic pattern(8 x 6) is displayed and f_V is the frame frequency.
- 2. The current is specified at the maximum current pattern.
- 3. The duration of rush current is about 2ms and rising time of power input is 0.5ms (min.).
- 4. Ripple voltage level is recommended under $\pm 5\%$ of typical voltage.
- 5. Maximum of power input voltage is included with ripple

White: 255 Gray Black: 0 Gray



Mosaic Pattern(8 x 6)

Ver. 1.0 5 / 37

Table 3. ELECTRICAL CHARACTERISTICS (Continue)


Parameter	Symbol		Values	Unit	Note	
Farameter	Symbol	Min	Тур	Max	Offic	Note
Backlight Assembly						
Forward Current(one array)	I _F	-	155	-	mAdc	±5% 2, 3
Forward Voltage	V_{F}		118.2	140	Vdc	4
Forward Voltage variation	AV _F	-	-	3.8	Vdc	5
Power Consumption	P_{BL}	-	37.4	43.4	W	6
Burst Dimming Duty	On duty	1		100	%	
Burst Dimming Frequency	1/T	95		182	Hz	8
LED Array: (APPENDIX-V)						
Life Time		30,000	50,000		Hrs	7

Notes: The design of the LED driver must have specifications for the LED array in LCD Assembly.

The electrical characteristics of LED driver are based on Constant Current driving type.

The performance of the LED in LCM, for example life time or brightness, is extremely influenced by the characteristics of the LED Driver. So, all the parameters of an LED driver should be carefully designed. When you design or order the LED driver, please make sure unwanted lighting caused by the mismatch of the LED and the driver (no lighting, flicker, etc) has never been occurred. When you confirm it, the LCD—Assembly should be operated in the same condition as installed in your instrument.

- 1. Electrical characteristics are based on LED Array specification.
- 2. Specified values are defined for a Backlight Assembly.
- 3. LED array has anode terminal and cathode terminal.

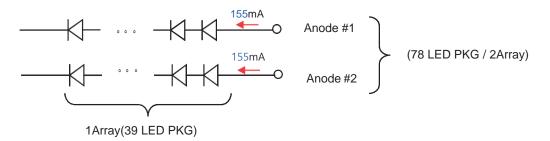

- 4. The forward voltage(V_F) of LED array depends on ambient temperature
- 5. AV_E means Max string VF Min string VF in one Backlight. So V_E variation in a Backlight isn't over Max. 3.8V
- 6. Maximum level of power consumption is measured at initial turn on.
- Typical level of power consumption is measured after 1hrs aging at 25 ± 2 °C.

 The life time(MTTF) is determined as the time at which brightness of the LED is 5
- 7. The life time(MTTF) is determined as the time at which brightness of the LED is 50% compared to that of initial value at the typical LED current on condition of continuous operating at 25 ± 2 °C, based on duty 100%. The reference method of burst dimming duty ratio.
- 8. It is recommended to use synchronous V-sync frequency to prevent waterfall (Vsync * 2 =Burst Frequency)

Though PWM frequency is over 182Hz (max252Hz), function of backlight is not affected.

Ver. 1.0 6 / 37

3-2. Interface Connections

This LCD module employs three kinds of interface connection, 51-pin connector is used for the module electronics.

3-2-1. LCD Module

- LCD Connector(CN1): FI-RXE51S-HF(manufactured by JAE) or GT05S-51S-H38(manufactured by LSM) or IS050-C51B-C39-C(manufactured by UJU)

Table 4. MODULE CONNECTOR(CN1) PIN CONFIGURATION

No	Symbol	Description	No	Symbol	Description
1	NC or GND	No Connection or Ground (Note 4)	27	NC	No connection
2	NC	No Connection (Note 4)	28	R2AN	SECOND LVDS Receiver Signal (A-)
3	NC	No Connection (Note 4)	29	R2AP	SECOND LVDS Receiver Signal (A+)
4	NC	No Connection (Note 4)	30	R2BN	SECOND LVDS Receiver Signal (B-)
5	NC	No Connection (Note 4)	31	R2BP	SECOND LVDS Receiver Signal (B+)
6	NC	No Connection (Note 4)	32	R2CN	SECOND LVDS Receiver Signal (C-)
7	LVDS Select	'H' =JEIDA , 'L' or NC = VESA	33	R2CP	SECOND LVDS Receiver Signal (C+)
8	NC	No Connection (Note 4)	34	GND	Ground
9	NC	No Connection (Note 4)	35	R2CLKN	SECOND LVDS Receiver Clock Signal(-)
10	NC	No Connection (Note 4)	36	R2CLKP	SECOND LVDS Receiver Clock Signal(+)
11	GND	Ground	37	GND	Ground
12	R1AN	FIRST LVDS Receiver Signal (A-)	38	R2DN	SECOND LVDS Receiver Signal (D-)
13	R1AP	FIRST LVDS Receiver Signal (A+)	39	R2DP	SECOND LVDS Receiver Signal (D+)
14	R1BN	FIRST LVDS Receiver Signal (B-)	40	NC	No connection
15	R1BP	FIRST LVDS Receiver Signal (B+)	41	NC	No connection
16	R1CN	FIRST LVDS Receiver Signal (C-)	42	NC or GND	No Connection or Ground
17	R1CP	FIRST LVDS Receiver Signal (C+)	43	NC or GND	No Connection or Ground
18	GND	Ground	44	GND	Ground (Note 5)
19	R1CLKN	FIRST LVDS Receiver Clock Signal(-)	45	GND	Ground
20	R1CLKP	FIRST LVDS Receiver Clock Signal(+)	46	GND	Ground
21	GND	Ground	47	NC	No connection
22	R1DN	FIRST LVDS Receiver Signal (D-)	48	VLCD	Power Supply +12.7V
23	R1DP	FIRST LVDS Receiver Signal (D+)	49	VLCD	Power Supply +12.7V
24	NC	No connection	50	VLCD	Power Supply +12.7V
25	NC	No connection	51	VLCD	Power Supply +12.7V
26	NC or GND	No Connection or Ground	-	-	-

Note

- 1. All GND(ground) pins should be connected together to the LCD module's metal frame.
- 2. All VLCD (power input) pins should be connected together.
- 3. All Input levels of LVDS signals are based on the EIA 644 Standard.
- 4. #1~#6 & #8~#10 NC (No Connection): These pins are used only for LGD (Do not connect)
- 5. Specific pin No. #44 is used for "No signal detection" of system signal interface. It should be GND for NSB(No Signal Black) during the system interface signal is not. If this pin is "H", LCD Module displays AGP(Auto Generation Pattern).

Ver. 1.0 7 / 37

3-2-2. Backlight Module

1) BLU Connector (Plug)

:SMH200-H07M(Terminal : Box Type)


2) Mating Connector (LPB, Socket)

: SMAW200A-H07AA

Table 5. BACKLIGHT CONNECTOR PIN CONFIGURATION

No	Symbol	Description	Note
1	F/B1	LED Output Current	
2	NC		
3	VLED1	LED Input Current	
4	NC		
5	F/B2	LED Output Current	
6	NC		
7	VLED2	LED Input Current	

◆ Rear view of LCM

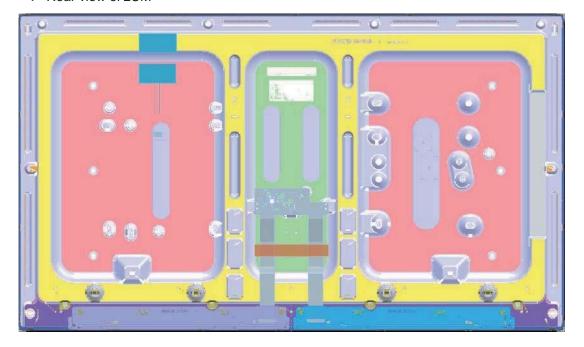

Ver. 1.0 8 / 37

3-3. Signal Timing Specifications

Table 6 shows the signal timing required at the input of the LVDS transmitter. All of the interface signal timings should be satisfied with the following specification for normal operation.

Table 6. TIMING TABLE for NTSC & PAL(DE Only Mode)


ITE	М	Symbol	Min	Тур	Max	Unit	notes
	Display Period		960	960	960	tCLK	1920 / 2
Horizontal	Blank	tHB	100	140	240	tCLK	1
	Total tнг		1060	1100	1200	tCLK	
	Display tvv		1080	1080	1080	Lines	
Vertical	Blank	tvB	20	45	300	Lines	1
	Total	tVP	1100	1125	1380	Lines	

ITE	М	Symbol	Min	Тур	Max	Unit	notes
	DCLK	DCLK fclk		74.25	.25 78.00		
Frequency	Horizontal	fн	57.3	67.5	70	KHz	2
	Vertical	fv	47	60	63	Hz	2

Note: 1. The input of HSYNC & VSYNC signal does not have an effect on normal operation (DE Only Mode). If you use spread spectrum of EMI, add some additional clock to minimum value for clock margin.

- 2. The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rate and the horizontal frequency
- 3. Spread Spectrum Rate (SSR) for 50KHz ~ 100kHz Modulation Frequency(FMOD) is calculated by (7 0.06*Fmod), where Modulation Frequency (FMOD) unit is KHz. LVDS Receiver Spread spectrum Clock is defined as below figure
- ▼ Timing should be set based on clock frequency.

Ver. 1.0 9 / 37

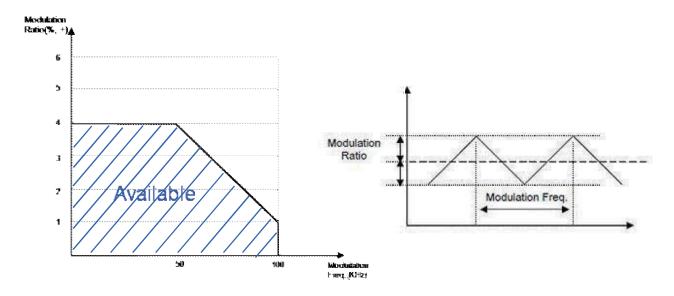


- ☑ Please pay attention to the followings when you set Spread Spectrum Rate(SSR) and Modulation Frequency(FMOD)
- 1. Please set proper Spread Spectrum Rate(SSR) and Modulation Frequency (FMOD) of TV system LVDS output.
- 2. Please check FOS after you set Spread Spectrum Rate(SSR) and Modulation Frequency(FMOD) to avoid abnormal display. Especially, haronic noise can appear when you use Spread Spectrum under FMOD 30 KHz.

Ver. 1.0 10 / 37

3-4. LVDS Signal Specification


3-4-1. LVDS Input Signal Timing Diagram

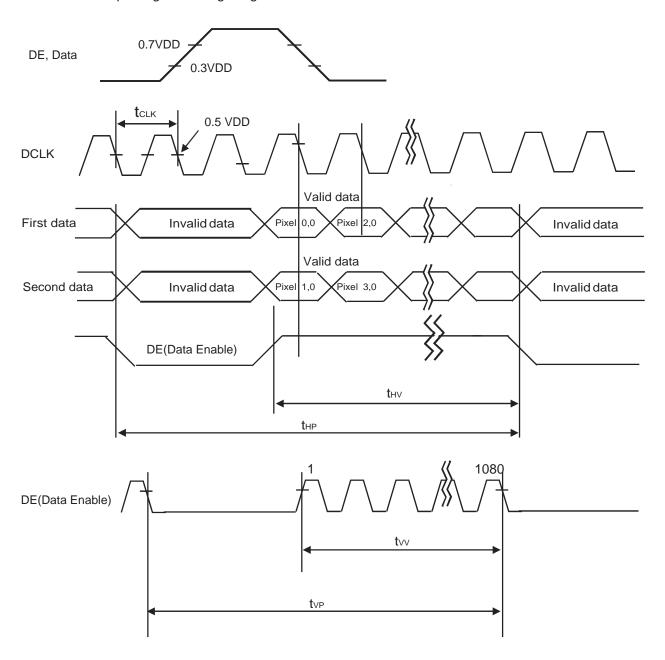

Ver. 1.0 11 / 37


3-4-2. LVDS Input Signal Characteristics

1) DC Specification

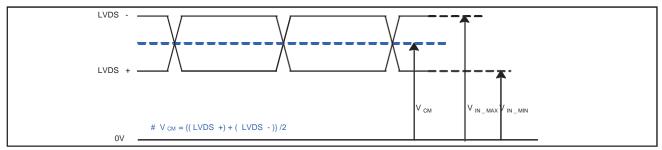

Description	Symbol	Min	Max	Unit	notes
LVDS Common mode Voltage	V _{CM}	1.0	1.5	V	-
LVDS Input Voltage Range	V _{IN}	0.7	1.8	V	-
Change in common mode Voltage	AVCM	-	250	mV	-

2) AC Specification

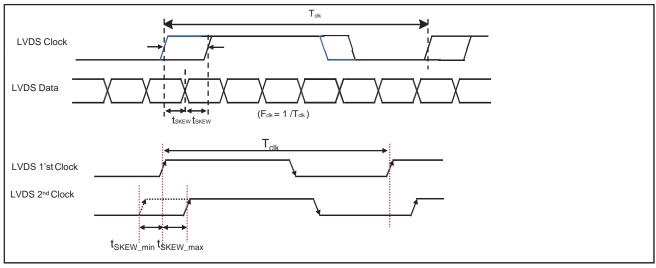


Description	Symbol	Min	Max	Unit	notes
	V_{TH}	100	600	mV	Tested with Differential Probe
LVDS DIfferential Voltage	V _{TL}	-600	-100	mV	2
LVDS Clock to Data Skew	t _{SKEW}	-	(0.2*T _{clk})/7	ps	-
Effective time of LVDS	t _{eff}	±360	-	ps	-
LVDS Clock to Clock Skew (Even to Odd)	t _{SKEW_EO}	-	1/7* T _{clk}	ps	-

notes 1. All Input levels of LVDS signals are based on the EIA 644 Standard.

2. LVDS Differential Voltage is defined within t_{eff}

Ver. 1.0 12 / 37

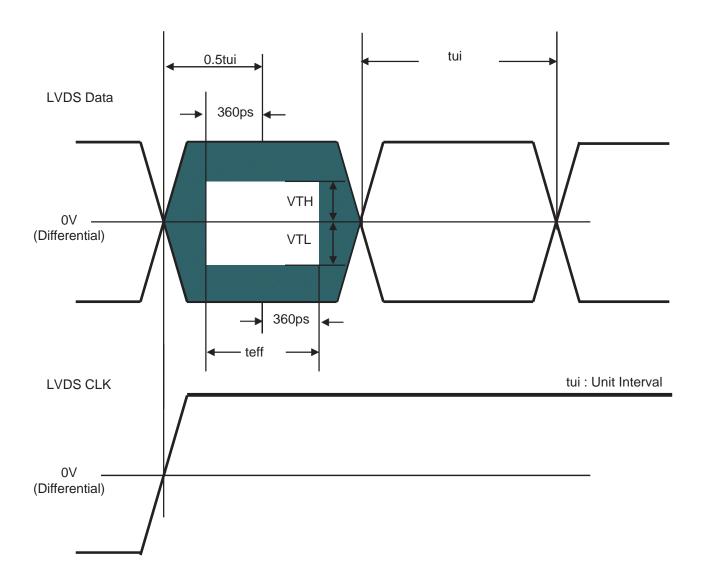

^{*} This accumulated waveform is tested with differential probe

Ver. 1.0 13 / 37

3-5. Color Data Reference

The brightness of each primary color(red,green,blue) is based on the 8bit gray scale data input for the color. The higher binary input, the brighter the color. Table 7 provides a reference for color versus data input.

Table 7. COLOR DATA REFERENCE

											I	npu	t Co	lor [Data										
	Color	MS	SB		RE	ΞD		LS	SB	MS	SB		GRI	EEN		L	SB	MS	SB		BL	UE		L	SB
		R	7 R	6 R5	R4	R3	R2 F	R1 R0)	G	7 G6	G5	G4	G3	G2 (G1 (30	В	7 B6	B5	B4	B3 E	32 B	1 B	30
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green (255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Basic	Blue (255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Color	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	RED (000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (001)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
RED				<i>0</i> .0	Ĭ.		Y																		
	RED (254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
GREEN																									
	GREEN (254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	GREEN (255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	BLUE (000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
BLUE																									
	BLUE (254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	BLUE (255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Ver. 1.0 14 / 37

3-6. Power Sequence

3-6-1. LCD Driving circuit

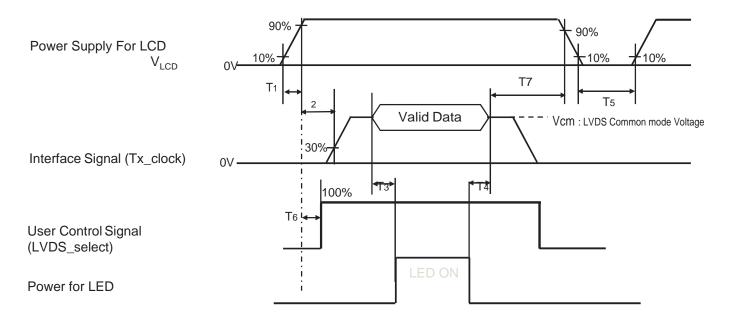


Table 8. POWER SEQUENCE

Davamatar			l loit	Natas	
Parameter	Min	Unit	Notes		
T1	0.5	-	20	ms	1
T2	0	-	-	ms	2
Т3	400	-	-	ms	3
T4	100	-	-	ms	3
T5	1.0	-	-	s	4
T6	0	-	T2	ms	5
T7	0	-	-	ms	6

Note:

- 1. Even though T1 is over the specified value, there is no problem if I2T spec of fuse is satisfied.
- 2. If T2 is satisfied with specification after removing LVDS Cable, there is no problem.
- 3. The T3 / T4 is recommended value, the case when failed to meet a minimum specification, abnormal display would be shown. There is no reliability problem.
- 4. T5 should be measured after the Module has been fully discharged between power off and on period.
- 5. If the on time of signals (Interface signal and user control signals) precedes the on time of Power (V_{LCD}), it will be happened abnormal display. When T6 is NC status, T6 doesn't need to be measured.
- 6. It is recommendation specification that T7 has to be 0ms as a minimum value.
- ☑ Please avoid floating state of interface signal at invalid period.
- When the power supply for LCD (VLCD) is off, be sure to pull down the valid and invalid data to 0V.

Ver. 1.0 15 / 37

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable in a dark environment at $25\pm2^{\circ}$ C. The values are specified at 50cm from the LCD surface at a viewing angle of 8 and 0 equal to 0 $^{\circ}$. FIG. 1 shows additional information concerning the measurement equipment and method.

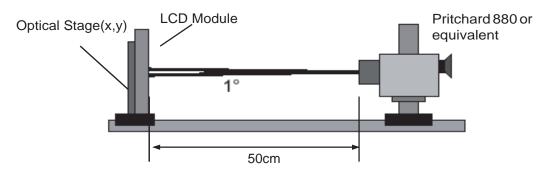


FIG. 1 Optical Characteristic Measurement Equipment and Method

Table 10. OPTICAL CHARACTERISTICS

Ta= 25 ± 2 °C, V_{LCD} =12.0V, f_{V} =60Hz, Dclk=74.25MHz, Duty =100%

5		0 1 1		Value		11. %	
Para	ameter	Symbol	Min	Тур	Max	Unit	notes
Contrast Ratio		CR	800	1100	-		1
Surface Luminance, white		L_WH	360	450	-	cd/m ²	2
Luminance Variation		6 _{WHITE} 9P	65	-	-		3
Response Time	Gray to Gray (BW)	G to G BW		12	16	ms	4
RED	DED	Rx		0.644			
	KED	Ry		0.336			
	GREEN	Gx	Тур	0.307	Typ +0.03		5
Color Coordinates [CIE1931]	GREEN	Gy	-0.03	0.601			5
	BLUE	Bx		0.152			
[5.2.55.]	BLUE	Ву		0.052			
	WHITE	Wx	Тур	0.281	Тур		5
	VVIIII	Wy	-0.03	0.288	+0.03		3
Color Temperature				10,000		K	
Color Gamut				68		%	
Viewing Angle (CR	k>10)						
x axis	s, right(\$=0°)	0r	89	-	-		
x axis	s, left (\$=180°)	OI	89	-	-	dograe	5
y axi	s, up (\$=90°)	0u	89	-	-	degree	5
	s, down (\$=270°)	0d	89	-	-		
Gray Scale			-	-	-		6

Ver. 1.0 16 / 37

Note: 1. Contrast Ratio(CR) is defined mathematically as:

Contrast Ratio = Surface Luminance with all white pixels
Surface Luminance with all black pixels

It is measured at center 1-point.

- 2.Surface luminance are determined after the unit has been 'ON' and 1 Hour after lighting the backlight in a dark environment at 25 ± 2 °C. Surface luminance is the luminance value at center 1-point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see the FIG. 3.
- 3. The variation in surface luminance, 6 WHITE is defined as: 6 WHITE(9P) = Minimum (Lon1,Lon2~ Lon8, Lon9) / Maximum (Lon1,Lon2~ Lon8, Lon9)*100 Where Lon1 to Lon9 are the luminance with all pixels displaying white at 9 locations. For more information, see the FIG. 3.
- 4. Response time is the time required for the display to transit from any gray to white (Rise Time, Tr_R) and from any gray to black (Decay time, Tr_D). For additional information see the FIG. 4.
 G to G_{BW} Spec stands for average value of all measured points.

Photo Detector: RD-80S / Field: 2

- 5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD module surface. For more information, see the FIG. 5.
- Gray scale specificationGamma Value is approximately 2.2. For more information, see the Table 11.


Ver. 1.0 17 / 37

Table 11. Gray scale specification

Gray Level	Luminance [%] (Typ)
LO	0.07
L15	0.27
L31	1.04
L47	2.49
L63	4.68
L79	7.66
L95	11.5
L111	16.1
L127	21.6
L143	28.1
L159	35.4
L175	43.7
L191	53.0
L207	63.2
L223	74.5
L239	86.7
L255	100

Ver. 1.0 18 / 37

Measuring point for surface luminance & measuring point for luminance variation.

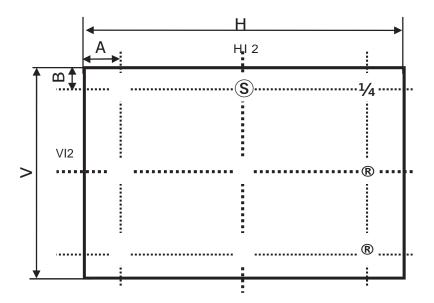

A:HI9 mm B:VI9 mm

@ H,V : Active Area

FIG. 3 9 Points for Luminance Measure

Response time is defined as the following figure and shall be measured by switching the input signal for "Gray(N)" and "Black or White".

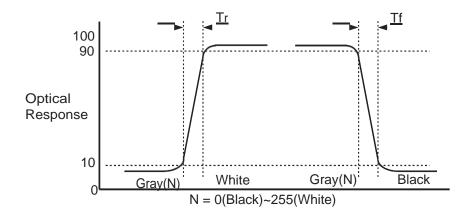


FIG. 4 Response Time

Ver. 1.0 19 / 37

Dimension of viewing angle range

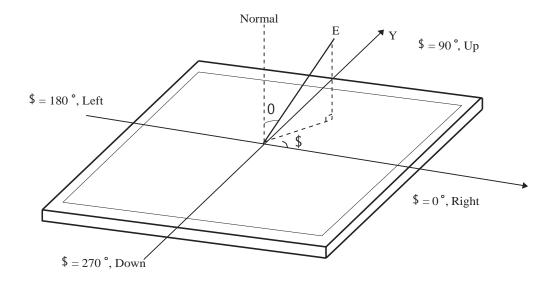


FIG. 5 Viewing Angle

Ver. 1.0 20 / 37

5. Mechanical Characteristics

Table 12 provides general mechanical characteristics.


Table 12. MECHANICAL CHARACTERISTICS

Item	Value)		
	Horizontal	963.6mm		
Outline Dimension	Vertical	557.9mm		
	Depth	14.0mm		
Antina Diaplay Area	Horizontal	941.184mm		
Active Display Area	Vertical	529.416mm		
	Material	РСМ		
Case Top	Color	Black		
	Manufactory	Hansung		
Weight	7.5Kg (Typ.)			

notes: Please refer to a mechanical drawing in terms of tolerance at the next page.


Ver. 1.0 21 / 37

[FRONT VIEW]

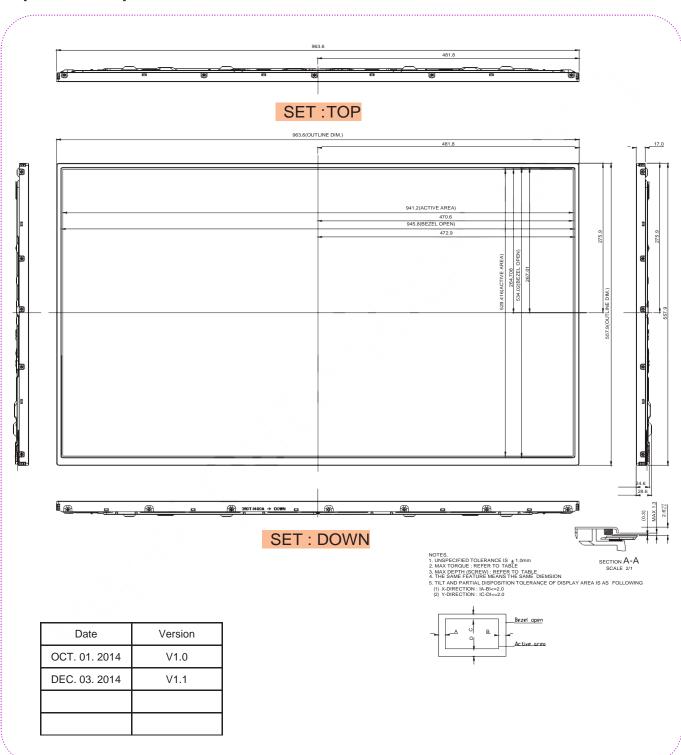

Ver. 1.0 22 / 37

[REAR VIEW]

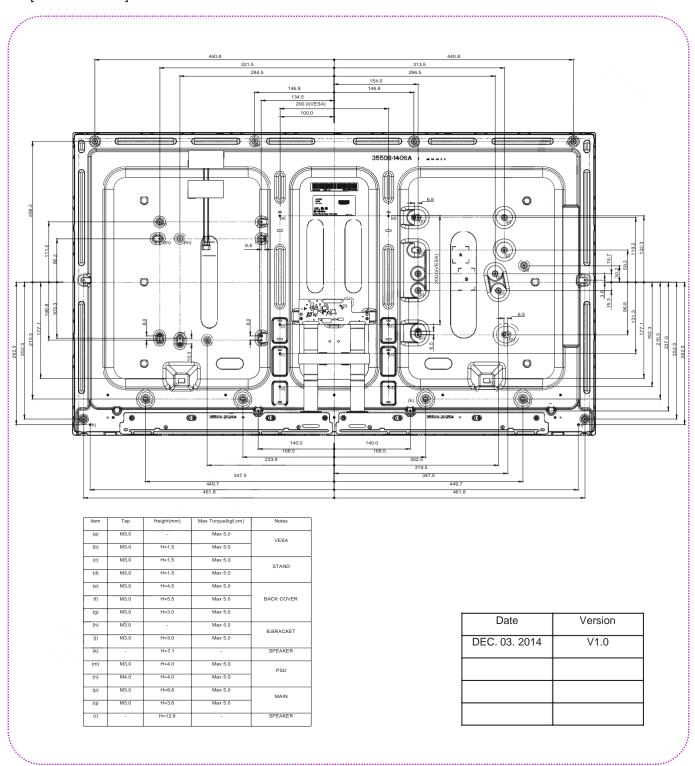

Ver. 1.0 23 / 37

6. Reliability

Table 13. ENVIRONMENT TEST CONDITION

No.	Test Item	Condition					
1	High temperature storage test	Ta= 60 °C 90% 240h					
2	Low temperature storage test	Ta= -20 °C 240h					
3	High temperature operation test	Ta= 50°C 50%RH 500h					
4	Low temperature operation test	Ta= 0 °C 500h					
5	Humidity condition Operation	Ta= 40 °C, 90%RH					
6	Altitude operating storage / shipment	0 – 16,400 ft 0 - 40,000 ft					
7	Panel Push Test (Module Condition)	Max 6kgf					

Note: 1. Before and after Reliability test, LCM should be operated with normal function.

2. These conditions are for LGD's internal test. Please refer to Absolute Maximum Ratings (Table1) for guaranteed condition.

Ver. 1.0 24 / 37

7. International Standards

7-1. Safety

- a) UL 60065, Underwriters Laboratories Inc.
 Audio, Video and Similar Electronic Apparatus Safety Requirements.
- b) CAN/CSA C22.2 No.60065:03, Canadian Standards Association. Audio, Video and Similar Electronic Apparatus Safety Requirements.
- c) EN 60065, European Committee for Electrotechnical Standardization (CENELEC). Audio, Video and Similar Electronic Apparatus Safety Requirements.
- d) IEC 60065, The International Electrotechnical Commission (IEC). Audio, Video and Similar Electronic Apparatus Safety Requirements.

7-2. Environment

a) RoHS, Directive 2011/65/EU of the European Parliament and of the council of 8 June 2011

Ver. 1.0 25 / 37

8. Packing

8-1. Information of LCM Label

a) Lot Mark



A,B,C : SIZE(INCH)

E: MONTH $F \sim M$: SERIAL NO.

Note

1. YEAR

Year	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Mark	Α	В	С	D	Е	F	G	Н	J	K

2. MONTH

Мс	onth	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
M	ark	1	2	3	4	5	6	7	8	9	Α	В	С

D: YEAR

b) Location of Lot Mark

Serial NO. is printed on the label. The label is attached to the backside of the LCD module. This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one Pallet: 26 pcs

b) Pallet Size: 1300 mm(W) X 1140 mm(D) X 746 mm(H)

Ver. 1.0 26 / 37

9. Precautions

Please pay attention to the followings when you use this TFT LCD module.

9-1. Mounting Precautions

- (1) You must mount a module using specified mounting holes (Details refer to the drawings).
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress, Concentrated stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzine. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2. Operating Precautions

- (1) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (2) Brightness depends on the temperature. (In lower temperature, it becomes lower.)

 And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer
- (3) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (4) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (5) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.
- (6) Please do not give any mechanical and/or acoustical impact to LCM. Otherwise, LCM can't be operated its full characteristics perfectly.
- (7) A screw which is fastened up the steels should be a machine screw. (if not, it can causes conductive particles and deal LCM a fatal blow)
- (8) Please do not set LCD on its edge.
- (9) The conductive material and signal cables are kept away from LED driver inductor to prevent abnormal display, sound noise and temperature rising.

Ver. 1.0 27 / 37

9-3. Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. Precautions for Strong Light Exposure

Strong light exposure causes degradation of polarizer and color filter.

9-5. Storage

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5 °C and 35 °C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.
- (3) Storage condition is guaranteed under packing conditions.
- (4) The phase transition of Liquid Crystal in the condition of the low or high storage temperature will be recovered when the LCD module returns to the normal condition.

9-6. Handling Precautions for Protection Film

- (1) The protection film is attached to the bezel with a small masking tape When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- (3) You can remove the glue easily. When the glue remains on the bezel surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

9-7. Appropriate Condition for Commercial Display

- Generally large-sized LCD modules are designed for consumer applications (TV).
 Accordingly, a long-term display like in Commercial Display application, can cause uneven display including image sticking. To optimize module's lifetime and function, several operating usages are required.
- 1. Normal operating condition
 - Temperature: 0 ~ 40?
 - Operating Ambient Humidity: 10 ~ 90 %
 - Display pattern: dynamic pattern (Real display)

Note) Long-term static display can cause image sticking.

- 2. Operating usages under abnormal condition
- a. Ambient condition
 - Well-ventilated place is recommended to set up Commercial Display system.
- b. Power and screen save
- Periodical power-off or screen save is needed after long-term display.


Ver. 1.0 28 / 37

- 3. Operating usages to protect against image sticking due to long-term static display
- a. Suitable operating time: under 24 hours a day.
 - (* The moving picture can be allowed for 24 hours a day)
- b. Static information display recommended to use with moving image.
- Cycling display between 5 minutes' information(static) display and 10 seconds' moving image.
- c. Background and character (image) color change
- Use different colors for background and character, respectively.
- Change colors themselves periodically.
- d. Avoid combination of background and character with large different luminance.
- 1) Abnormal condition just means conditions except normal condition.
- 2) Black image or moving image is strongly recommended as a screen save.
- 4. Lifetime in this spec. is guaranteed only when Commercial Display is used according to operating usages.
- 5. Module should be turned counter-clockwise based on front view when used in portrait mode.

Ver. 1.0 29 / 37

APPENDIX-I

■ Pallet Ass'y

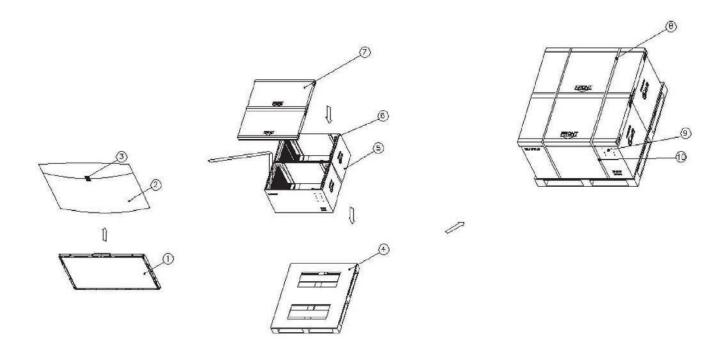

NO.	DESCRIPTION	MATERIAL				
1	LCD Module	43" LCD				
2	BAG	AL				
3	TAPE	MASKING 20MMX50M				
4	PALLET	Plywood 1300X1140X134.5mm				
5	PACKING,BOTTOM	PAPER				
6	PACKING,BOTTOM PAD	EPS				
7	PACKING,TOP	PAPER				
8	BAND	PP				
9	LABEL	YUPO 80G 100X70				
10	BAND CLIP	STEEL OR PP				

Ver. 1.0 30 / 37

APPENDIX- II-1

■ LCM Label



■ Production site

- LG Oisplay (Guangzhou) Co., LTO

notes I. The origin of LCM Label will be changed according to the production site.

Ver. 1.0 31 / 37

APPENDIX- II-2


■ Pallet Label



Ver. 1.0 32 / 37

APPENDIX- III-1

■ Required signal assignment for Flat Link (Thine: THC63LVD103) Transmitter(Pin7="L" or "NC")

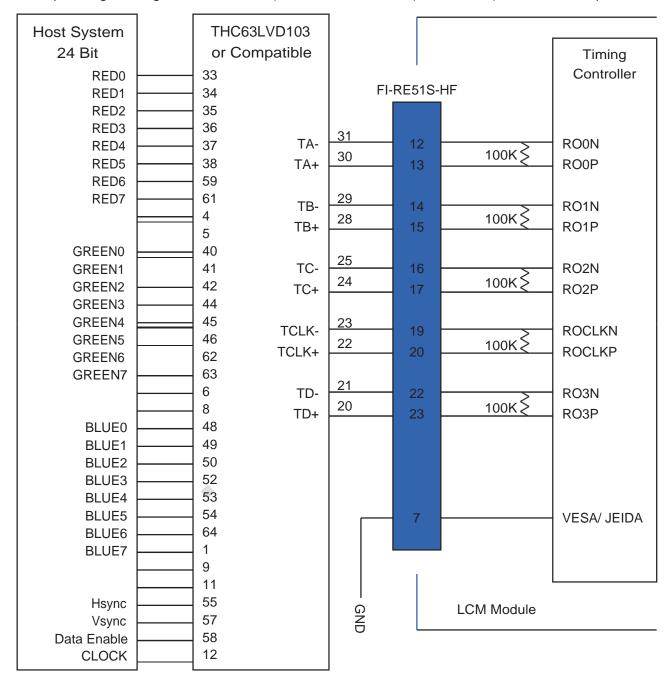


Note: 1. The LCD module uses a 100 Ohm[K] resistor between positive and negative lines of each receiver input.

- 2. Refer to LVDS Transmitter Data Sheet for detail descriptions. (THC63LVD103 or Compatible)
- 3. '7' means MSB and '0' means LSB at R,G,B pixel data.

Ver. 1.0 33 / 37

APPENDIX- III-2

■ Required signal assignment for Flat Link (Thine: THC63LVD103) Transmitter(Pin7= "H")

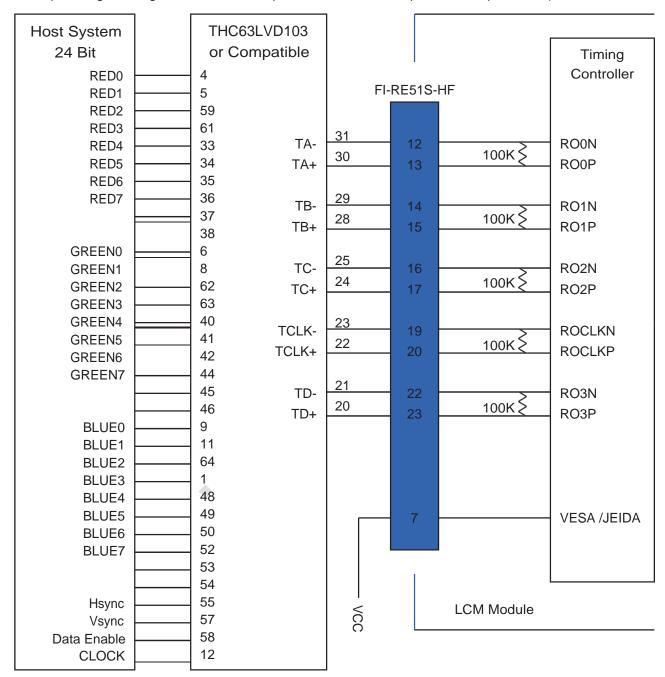


Note: 1. The LCD module uses a 100 Ohm[K] resistor between positive and negative lines of each receiver input.

- 2. Refer to LVDS Transmitter Data Sheet for detail descriptions. (THC63LVD103 or Compatible)
- 3. '7' means MSB and '0' means LSB at R,G,B pixel data.


Ver. 1.0 34 / 37

APPENDIX- IV

- LVDS Data-Mapping Information (8 Bit)
 - 1) LVDS Select: "H" Data-Mapping (JEIDA format)

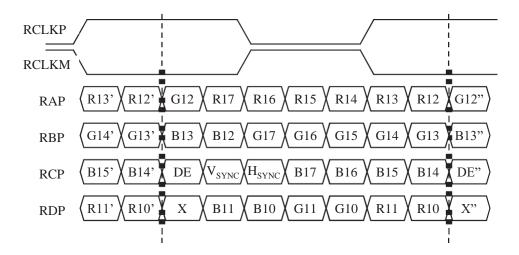


2) LVDS Select: "L" Data-Mapping (VESA format)

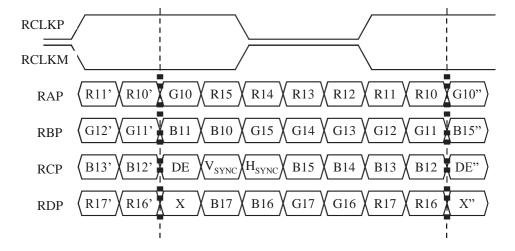

Ver. 1.0 35 / 37

APPENDIX- V

- Option Pin Circuit Block Diagram
 - 1) Circuit Block Diagram of LVDS Format Selection pin

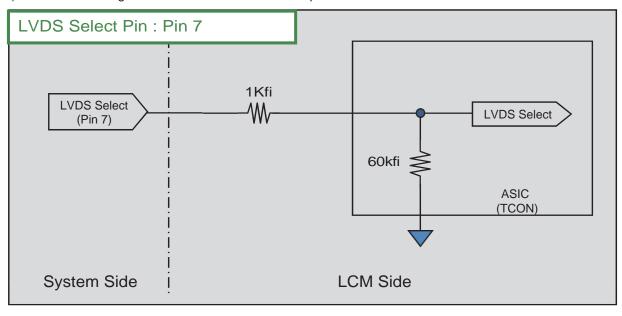

Ver. 1.0 36 / 37